

CAIET DE SARCINI

Deviz TIGL18

RIDICARE LA COTA A CAPACELOR CAMINELOR DE VIZITARE - ANALIZA DE PRET (LEI/BUC)

TIGLINA I - B.P.S.I.A

24 BUCATI

Categoria de lucrari: 8300

Nr. Capitol de lucr. crt. sau Subcapitol (norma comasata) Denumire	UM	CANTITATEA	PU a)Material b)Manopera c)Utilaj d)Transport ( RON /UM)	MATERIAL (col.3x col.4a)  ( RON )	MANOPERA (col.3x col.4b)  ( RON )	UTILAJ (col.3x col.4c)  ( RON )	TRANSPORT (col.3x col.4d)  ( RON )	TOTAL (col.5+ 6+7+8)  ( RON )
--	----	------------	---	---	---	---	--	---

Sectiunea tehnica				Sectiunea financiara					
0	1	2	3	4	5	6	7	8	9

001 DC04B1 M 6.000  
TAIEREA CU MAS.CU DISC DIAMANT ROST  
CONTRACTIE SI DILATATIE BETON UZURA LA  
DRUMURI

002 DG06A1 [13] M.C. 0.492  
Sparg. si desf. beton

003 RPCD02A3 KG 14.280  
ARMATURI DIN OTEL BETON MONTAT IN ELEM  
DE BET.ARM.PL.STILP.GRIN.PC52 CU DIST.  
DIN MORTAR CIMENT \*

004 RPAB01A1 BUC. 1.000  
RIDICARE LA NIVEL A CAPACELOR (I=20CM)  
CAMINELOR DE VIZITARE PINA LA 100KG PE  
ZIDARIE CAR.MORT.C

005 DC05C1 [ 9] MP. 2.460  
Imbrac bet cim B400 gr. 20 cm

005 2100995 M.C. 0.494  
Beton de ciment B 400

006 TRI1AH03E1 [10] TONA 1.096  
Inc.mat cu buldoexcavatorul

007 TRB01A13 TONA 2.277  
TRANSPORTUL MATERIALELOR CU ROABA PE  
PNEURI INC ASEZARE DESC ASEZARE GRUPA 1-  
3 DISTANTA 30M

008 TRA01A10 TONA 1.096  
Transp.rutier pamant,moloz, mat. cu  
auto, d=10 km

009 DF24A1 [ 2] BUC. 1.000  
Semnalizare rutiera lucrari

Cheltuieli directe din articole:

GREUTATE	MATERIALE	MANOPERA	UTILAJ	TRANSPORT	TOTAL
Din care:					
Valoare aferenta utilaje termice =					

Valoare aferenta utilaje electrice =

Detaliere transporturi:

-Articole TRA

Alte cheltuieli directe:

-Contributie asiguratorie pentru munca

Total cheltuieli directe:

GREUTATE	MATERIALE	MANOPERA	UTILAJ	TRANSPORT	TOTAL
----------	-----------	----------	--------	-----------	-------

Cheltuieli indirecte:


Profit:

TOTAL GENERAL DEVIZ:

TVA

TOTAL cu TVA

SEF SECTIE IRU,  
ING. DANA URSACHEL

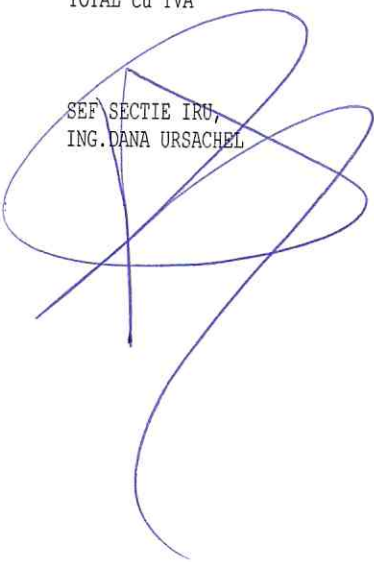

CAIA DE SARCINI

Deviz TIGL19 RIDICARE LA COTA GURI DE SCURGERE - ANALIZA DE PRET (LEI/BUC) - TIGLINA I - ZONA  
BL.PS11

Categoria de lucrari: 8300

1 BUCATA

Nr. Capitol de lucr. crt. sau Subcapitol (norma comasata) Denumire	UM	CANTITATEA	PU a)Material b)Manopera c)Utilaj d)Transport ( RON /UM)	MATERIAL (col.3x col.4a) ( RON )	MANOPERA (col.3x col.4b) ( RON )	UTILAJ (col.3x col.4c) ( RON )	TRANSPORT (col.3x col.4d) ( RON )	TOTAL (col.5+ 6+7+8) ( RON )
--	----	------------	---	---	---	---	--	---------------------------------------

Sectiunea tehnica			Sectiunea financiara						
0	1	2	3	4	5	6	7	8	9

001 DC04B1 M 4.400

TAIEREA CU MAS.CU DISC DIAMANT ROST  
CONTRACTIE SI DILATATIE BETON UZURA LA  
DRUMURI

002 DG06A1 [13] M.C. 0.238  
Sparg. si desf. beton

003 RPAI13A1 [ 1] BUC. 1.000  
Ridic.la cota guri de scurgere

004 DC05C1 [ 9] MP. 0.950  
Imbrac bet cim B400 gr. 20 cm

004 2100995 M.C. 0.191  
Beton de ciment B 400

005 TRI1AH03E1 [31] TONA 0.524  
INCARCARE MATERIALE IN AUTO CU  
BULDOEXCAVATORUL

006 TRB01A11 [ 1] TONA 1.095  
Transport mat. cu roaba

007 TRA01A10 TONA 0.524  
Transp.rutier pamant,moloz, mat. cu  
auto, d=10 km

008 DF24A1 [ 2] BUC. 1.000  
Semnalizare rutiera lucrari

Cheltuieli directe din articole:

GREUTATE MATERIALE MANOPERA UTILAJ TRANSPORT TOTAL

Detaliere transporturi:  
-Articole TRA

Alte cheltuieli directe:

-Contributie asiguratorie pentru munca

Total cheltuieli directe:

GREUTATE	MATERIALE	MANOPERA	UTILAJ	TRANSPORT	TOTAL
----------	-----------	----------	--------	-----------	-------

Cheltuieli indirecte:


Profit:

TOTAL GENERAL DEVIZ:

TVA

TOTAL cu TVA

SEF SECTIE REP.URBANE,  
ING.DANA URSACHEL

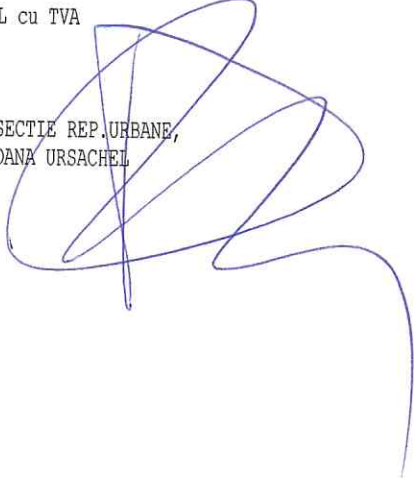

CAIET DE SARCINI  
 Deviz TIG112 IMBRACAMINTE ASFALTICA DIN BA8 - 4 CM GROSIME - ANALIZA DE PRET (LEI/MP)  
 TIGLINA I - BL.PS11A

Categoria de lucrari: 8300 830 MP

Nr. Capitol de lucr. crt.	UM sau	CANTITATEA	PU	MATERIAL	MANOPERA	UTILAJ	TRANSPORT	TOTAL
			a)Material	(col.3x	(col.3x	(col.3x	(col.3x	(col.5+
	Subcapitol(norma comasata)		b)Manopera	col.4a)	col.4b)	col.4c)	col.4d)	6+7+8)
	Denumire		c)Utilaj					
			d)Transport					
			( RON /UM)	( RON )	( RON )	( RON )	( RON )	( RON )

Sectiunea tehnica			Sectiunea financiara						
0	1	2	3	4	5	6	7	8	9

001 DB01A1 [ 3] MP. 1.000  
 Curatirea man. a suprafetelor

002 DB02D1 [13] 100 MP. 0.010  
 Amorsare supraf.

003 DB16D1 MP. 1.000  
 IMBRAC BET ASF CU AGREGATE MARUNTE  
 EXECUTATA LA CALD, IN GROSIME DE 4,0 CM,  
 CU ASTERNERE MANUALA

003 2590017 TONA 0.094  
 Beton asfaltic BA8

004 AUT1173 ORA 0.014  
 BULDOEXCAVATOR CU INCARCATOR

Cheltuieli directe din articole:

GREUTATE	MATERIALE	MANOPERA	UTILAJ	TRANSPORT	TOTAL
----------	-----------	----------	--------	-----------	-------

Alte cheltuieli directe:

-Contributie asiguratorie pentru munca

Total cheltuieli directe:

GREUTATE	MATERIALE	MANOPERA	UTILAJ	TRANSPORT	TOTAL
----------	-----------	----------	--------	-----------	-------

Cheltuieli indirecte:


Profit:

TOTAL GENERAL DEVIZ:

TVA

TOTAL cu TVA

SEE SECTIE REP.URBANE,  
 ING.DANA URSACHEL

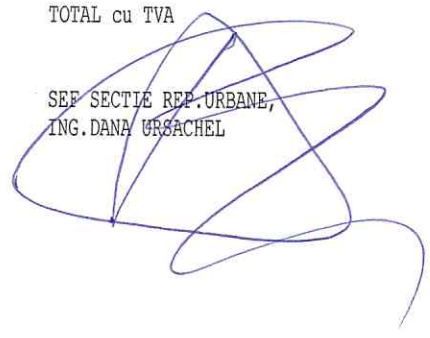

CAIET DE SARCINI

Deviz ANA707

FREZAREA SUPRAFETELOR ASFALTICE IN GROSIME MEDIE DE 5 CM - ANALIZA DE PRET (LEI/100 MP)  
TIGLINA I - ZONA BLOC PS11A

Categoria de lucrari: 8300

1700 MP

Nr. crt.	Capitol de lucr. sau Denumire	UM	CANTITATEA	PU a)Material b)Manopera c)Utilaj d)Transport ( RON /UM)	MATERIAL (col.3x col.4a) ( RON )	MANOPERA (col.3x col.4b) ( RON )	UTILAJ (col.3x col.4c) ( RON )	TRANSPORT (col.3x col.4d) ( RON )	TOTAL (col.5+ 6+7+8) ( RON )
Sectiunea tehnica				Sectiunea financiara					
0	1	2	3	4	5	6	7	8	9

001 DG05A1 [ 2] MP.  
Frezarea supraf.asfaltice 100.000

002 TRI1AA01C3 [ 3] TONA  
Incarcare mat de freza 3.525

003 AUT1173 ORA  
BULDOEXCAVATOR CU INCARCATOR 1.550

004 TRA01A10 TONA 11.750  
Transp.rutier pamant,moloz, mat. cu  
auto, d=10 km

005 DF24A1 [ 2] BUC. 1.000  
Semnalizare rutiera lucrari

Cheltuieli directe din articole:

GREUTATE MATERIALE MANOPERA UTILAJ TRANSPORT TOTAL

-Contributie asiguratorie pentru munca

Total cheltuieli directe:

GREUTATE MATERIALE MANOPERA UTILAJ TRANSPORT TOTAL

Cheltuieli indirecte:

Profit:

TOTAL GENERAL DEVIZ:

TVA

TOTAL cu TVA

SEF SECTIE REP.URBANE,  
ING.DANA URSACHEL

